

SMD POWER INDUCTOR

- CCD SERIES -



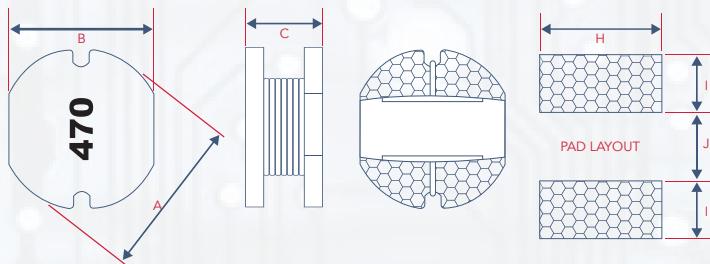
■ FEATURES

- High power, High saturation inductors
- Silver Plated Type, Low cost design
- Ideal inductors for DC-DC converters
- Available on tape and reel for auto surface mounting.

■ APPLICATIONS

- Power Supply For VTRs.
- LCD Televisions
- Personal Computers
- Handheld Communication
- DC/DC Converters, etc

■ CONSTRUCTION



■ CHARACTERISTICS

- Rated DC Current: The DC current when the inductance becomes 10% lower than its initial value or DC current when temperature of coil is increased to 40°C. (Ta=25°C)
- The smaller one is defined as Rated DC Current.
- Operating temperature range: -40~125°C

■ DIMENSIONS

| TYPE | A (MAX) | B (MAX) | C (MAX) | H | I | J |
|---------|------------|------------|------------|------|------|-----|
| CCD0301 | 3.5±0.3 | 3.0±0.3 | 1.15±0.3 | 3.50 | 1.60 | 0.8 |
| CCD0302 | 3.5±0.3 | 3.0±0.3 | 2.1±0.3 | 3.50 | 1.60 | 0.8 |
| CCD0403 | 4.5±0.3 | 4.0±0.3 | 3.2±0.3 | 4.50 | 1.75 | 1.5 |
| CCD0502 | 5.8±0.3 | 5.2±0.3 | 2.5±0.3 | 5.50 | 2.15 | 1.7 |
| CCD0503 | 5.8±0.3 | 5.2±0.3 | 3.0±0.3 | 5.50 | 2.15 | 1.7 |
| CCD0504 | 5.8±0.3 | 5.2±0.3 | 4.5±0.3 | 5.50 | 2.15 | 1.7 |
| CCD0703 | 7.8±0.3 | 7.0±0.3 | 3.5±0.5 | 7.50 | 3.00 | 2.0 |
| CCD0705 | 7.8±0.3 | 7.0±0.3 | 5.0±0.5 | 7.50 | 3.00 | 2.0 |
| CCD1004 | 10.0±0.4 | 9.0±0.3 | 4.0±0.5 | 9.50 | 3.75 | 2.5 |
| CCD1005 | 10.0±0.4 | 9.0±0.3 | 5.4±0.5 | 9.50 | 3.75 | 2.5 |
| CCD1006 | 10.0±0.4 | 9.0±0.3 | 7.5 max. | 9.50 | 3.75 | 2.5 |

■ INDUCTANCE AND RATED CURRENT RANGES

| | | |
|---------|--------------|-------------|
| CCD0301 | 1.0μH~390μH | 1.40~0.10A |
| CCD0302 | 1.0μH~330μH | 2.20~0.09A |
| CCD0403 | 1.0μH~1000μH | 2.70~0.109A |
| CCD0502 | 1.0μH~470μH | 4.00~0.15A |
| CCD0503 | 1.0μH~1000μH | 4.50~0.13A |
| CCD0504 | 1.0μH~1000μH | 5.00~0.26A |

| | | |
|---------|--------------|------------|
| CCD0703 | 1.0μH~1000μH | 1.64~0.20A |
| CCD0705 | 1.0μH~1000μH | 3.40~0.30A |
| CCD1004 | 1.0μH~560μH | 8.70~0.32A |
| CCD1005 | 1.2μH~1000μH | 8.63~0.20A |
| CCD1006 | 1.0μH~1000μH | 9.50~0.46A |

- Test Equipment:
L: HP4284A LCR meter
DCR: Milli-ohm meter
- Electrical specifications at 25°C

■ PART NUMBERING

| CCD | 1005 | M | 101 | T |
|---|-----------------------|---------------------------------------|-----------------|------------|
| PRODUCT TYPE | DIMENSIONS (AxBxC) | INDUCTOR TOLERANCE | PACKAGING STYLE | INDUCTANCE |
| 0301: 3.5x3.0x1.15 0302: 3.5x3.0x2.1 0403: 4.5x4.0x3.2 0502: 5.8x5.2x2.5 0503: 5.8x5.2x3.0 0504: 5.8x5.2x4.5 0703: 7.8x7.0x3.5 0705: 7.8x7.0x5.0 1004: 10x9.0x4.0 1005: 10x9.0x5.4 1006: 10x9.0x7.5 | K: ±10% M: ±20% | 1R0: 1.0μH 470: 47μH 101: 100μH | T: Tape & Reel | |





ELECTRICAL CHARACTERISTICS

CCD0301 TYPE

| CODES | L (μ H) | TOLERANCE | TEST CONDITION | DCR (Ω) MAX | IDC (A) MAX |
|-------|-----------------|-----------|----------------|-------------------------|----------------|
| 1R0 | 1.0 | M | 100KHz, 0.25V | 0.060 | 1.40 |
| 1R5 | 1.5 | M | 100KHz, 0.25V | 0.081 | 1.30 |
| 1R8 | 1.8 | M | 100KHz, 0.25V | 0.098 | 1.24 |
| 2R2 | 2.2 | M | 100KHz, 0.25V | 0.240 | 1.20 |
| 2R7 | 2.7 | M | 100KHz, 0.25V | 0.135 | 1.04 |
| 3R3 | 3.3 | M | 100KHz, 0.25V | 0.270 | 1.00 |
| 3R9 | 3.9 | M | 100KHz, 0.25V | 0.188 | 0.79 |
| 4R7 | 4.7 | M | 100KHz, 0.25V | 0.400 | 0.90 |
| 5R6 | 5.6 | M | 100KHz, 0.25V | 0.450 | 0.65 |
| 6R8 | 6.8 | M | 100KHz, 0.25V | 0.500 | 0.56 |
| 8R2 | 8.2 | M | 100KHz, 0.25V | 0.650 | 0.50 |
| 100 | 10 | M | 1KHz, 0.25V | 0.750 | 0.45 |
| 120 | 12 | M | 1KHz, 0.25V | 0.850 | 0.43 |
| 150 | 15 | M | 1KHz, 0.25V | 1.200 | 0.39 |
| 180 | 18 | M | 1KHz, 0.25V | 1.300 | 0.32 |
| 220 | 22 | M | 1KHz, 0.25V | 1.500 | 0.28 |
| 270 | 27 | M | 1KHz, 0.25V | 2.200 | 0.26 |
| 330 | 33 | M | 1KHz, 0.25V | 2.800 | 0.25 |
| 470 | 47 | M | 1KHz, 0.25V | 4.000 | 0.21 |
| 560 | 56 | M | 1KHz, 0.25V | 4.500 | 0.20 |
| 680 | 68 | M | 1KHz, 0.25V | 5.000 | 0.18 |
| 820 | 82 | M | 1KHz, 0.25V | 6.500 | 0.16 |
| 101 | 100 | M | 1KHz, 0.25V | 7.500 | 0.15 |
| 221 | 220 | M | 1KHz, 0.25V | 14.0 | 0.13 |
| 331 | 330 | M | 1KHz, 0.25V | 22.0 | 0.11 |
| 391 | 390 | M | 1KHz, 0.25V | 26.00 | 0.10 |



Cal-Chip
Electronics Inc.



ELECTRICAL CHARACTERISTICS

CCD0302 / 0403 / 0502 TYPE

| CODES | L (μ H) | TOLERANCE | TEST CONDITION | DCR (Ω) MAX | | | IDC (A) MAX | | |
|-------|-----------------|-----------|----------------|----------------------|-------|-------|-------------|-------|-------|
| | | | | 0302 | 0403 | 0502 | 0302 | 0403 | 0502 |
| 1R0 | 1.0 | M | 100KHz, 0.25V | 0.045 | 0.049 | 0.021 | 2.200 | 2.700 | 4.00 |
| 1R2 | 1.2 | M | 100KHz, 0.25V | 0.050 | 0.053 | 0.050 | 2.100 | 2.540 | 4.200 |
| 1R4 | 1.4 | M | 100KHz, 0.25V | 0.050 | 0.056 | - | 2.000 | 2.500 | - |
| 1R5 | 1.5 | M | 100KHz, 0.25V | 0.055 | 0.061 | 0.060 | 1.700 | 2.240 | 4.000 |
| 1R8 | 1.8 | M | 100KHz, 0.25V | 0.070 | 0.064 | 0.065 | 1.650 | 2.330 | 3.700 |
| 2R2 | 2.2 | M | 100KHz, 0.25V | 0.085 | 0.072 | 0.070 | 1.600 | 2.250 | 3.500 |
| 2R7 | 2.7 | M | 100KHz, 0.25V | 0.100 | 0.079 | 0.080 | 1.400 | 2.160 | 3.200 |
| 3R3 | 3.3 | M | 100KHz, 0.25V | 0.120 | 0.086 | 0.100 | 1.040 | 2.000 | 2.700 |
| 3R9 | 3.9 | M | 100KHz, 0.25V | 0.130 | 0.094 | 0.120 | 1.000 | 1.840 | 2.400 |
| 4R7 | 4.7 | M | 100KHz, 0.25V | 0.170 | 0.109 | 0.140 | 1.000 | 1.620 | 2.00 |
| 5R6 | 5.6 | M | 100KHz, 0.25V | 0.185 | 0.126 | 0.150 | 0.950 | 1.480 | 1.800 |
| 6R8 | 6.8 | M | 100KHz, 0.25V | 0.200 | 0.131 | 0.160 | 0.950 | 1.430 | 1.500 |
| 8R2 | 8.2 | M | 100KHz, 0.25V | 0.250 | 0.147 | 0.170 | 0.900 | 1.370 | 1.400 |
| 100 | 10 | K, M | 1KHz, 0.25V | 0.320 | 0.182 | 0.200 | 0.760 | 1.040 | 1.300 |
| 120 | 12 | K, M | 1KHz, 0.25V | 0.350 | 0.210 | 0.230 | 0.685 | 0.970 | 1.100 |
| 150 | 15 | K, M | 1KHz, 0.25V | 0.460 | 0.235 | 0.250 | 0.635 | 0.850 | 1.050 |
| 180 | 18 | K, M | 1KHz, 0.25V | 0.520 | 0.338 | 0.300 | 0.525 | 0.740 | 1.000 |
| 220 | 22 | K, M | 1KHz, 0.25V | 0.660 | 0.378 | 0.350 | 0.500 | 0.680 | 0.900 |
| 270 | 27 | K, M | 1KHz, 0.25V | 0.760 | 0.522 | 0.400 | 0.405 | 0.620 | 0.850 |
| 330 | 33 | K, M | 1KHz, 0.25V | 0.920 | 0.540 | 0.500 | 0.380 | 0.560 | 0.750 |
| 390 | 39 | K, M | 1KHz, 0.25V | 1.120 | 0.587 | 0.550 | 0.355 | 0.520 | 0.700 |
| 470 | 47 | K, M | 1KHz, 0.25V | 1.270 | 0.844 | 0.650 | 0.330 | 0.440 | 0.600 |
| 560 | 56 | K, M | 1KHz, 0.25V | 1.500 | 0.937 | 0.760 | 0.290 | 0.420 | 0.550 |
| 680 | 68 | K, M | 1KHz, 0.25V | 2.000 | 1.117 | 0.950 | 0.260 | 0.370 | 0.500 |
| 820 | 82 | K, M | 1KHz, 0.25V | 2.440 | 1.140 | 1.200 | 0.230 | 0.340 | 0.450 |
| 101 | 100 | K, M | 1KHz, 0.25V | 2.850 | 1.190 | 1.400 | 0.200 | 0.300 | 0.400 |
| 121 | 120 | K, M | 1KHz, 0.25V | 3.400 | 1.400 | 1.750 | 0.180 | 0.256 | 0.350 |
| 151 | 150 | K, M | 1KHz, 0.25V | 4.470 | 1.800 | 2.000 | 0.160 | 0.212 | 0.250 |
| 181 | 180 | K, M | 1KHz, 0.25V | 5.110 | 1.920 | 2.600 | 0.150 | 0.200 | 0.250 |
| 221 | 220 | K, M | 1KHz, 0.25V | 7.310 | 2.030 | 3.000 | 0.140 | 0.180 | 0.200 |
| 271 | 270 | K, M | 1KHz, 0.25V | 8.500 | 2.890 | 3.700 | 0.100 | 0.174 | 0.180 |
| 331 | 330 | K, M | 1KHz, 0.25V | 10.19 | 3.760 | 4.300 | 0.090 | 0.168 | 0.170 |
| 391 | 390 | K, M | 1KHz, 0.25V | - | 4.260 | 6.000 | - | 0.160 | 0.160 |
| 471 | 470 | K, M | 1KHz, 0.25V | - | 5.140 | 6.700 | - | 0.158 | 0.150 |
| 561 | 560 | K, M | 1KHz, 0.25V | - | 6.370 | - | - | 0.148 | - |
| 681 | 680 | K, M | 1KHz, 0.25V | - | 9.240 | - | - | 0.128 | - |
| 821 | 820 | K, M | 1KHz, 0.25V | - | 13.40 | - | - | 0.110 | - |
| 102 | 1000 | K, M | 1KHz, 0.25V | - | 15.60 | 15.00 | - | 0.109 | 0.140 |





ELECTRICAL CHARACTERISTICS

CCD0503 / 0504 / 0703 TYPE

| CODES | L (μ H) | TOLERANCE | TEST CONDITION | DCR (Ω) MAX | | | IDC (A) MAX | | |
|-------|-----------------|-----------|----------------|----------------------|-------|-------|-------------|------|------|
| | | | | 0503 | 0504 | 0703 | 0503 | 0504 | 0703 |
| 1R0 | 1.0 | M | 100KHz, 0.25V | 0.03 | 0.01 | 0.018 | 4.50 | 5.00 | 1.64 |
| 1R2 | 1.2 | M | 100KHz, 0.25V | 0.03 | 0.012 | - | 4.20 | 4.77 | - |
| 1R5 | 1.5 | M | 100KHz, 0.25V | 0.03 | 0.013 | 0.020 | 4.10 | 4.50 | 1.60 |
| 1R8 | 1.8 | M | 100KHz, 0.25V | 0.03 | 0.016 | - | 3.70 | 4.25 | - |
| 2R2 | 2.2 | M | 100KHz, 0.25V | 0.03 | 0.017 | 0.023 | 3.50 | 4.20 | 1.60 |
| 2R7 | 2.7 | M | 100KHz, 0.25V | 0.04 | 0.025 | - | 3.20 | 4.00 | - |
| 3R3 | 3.3 | M | 100KHz, 0.25V | 0.05 | 0.034 | 0.025 | 2.80 | 2.50 | 1.59 |
| 3R9 | 3.9 | M | 100KHz, 0.25V | 0.06 | 0.035 | - | 2.60 | 2.20 | - |
| 4R7 | 4.7 | M | 100KHz, 0.25V | 0.07 | 0.035 | 0.039 | 2.50 | 2.00 | 1.54 |
| 5R6 | 5.6 | M | 100KHz, 0.25V | 0.08 | 0.042 | - | 2.40 | 1.82 | - |
| 6R8 | 6.8 | M | 100KHz, 0.25V | 0.09 | 0.060 | 0.040 | 2.20 | 1.69 | 1.49 |
| 8R2 | 8.2 | M | 100KHz, 0.25V | 0.10 | 0.060 | 0.080 | 2.00 | 1.56 | 1.46 |
| 100 | 10 | K, M | 1KHz, 0.25V | 0.13 | 0.100 | 0.080 | 1.80 | 1.44 | 1.44 |
| 120 | 12 | K, M | 1KHz, 0.25V | 0.16 | 0.120 | 0.090 | 1.75 | 1.40 | 1.39 |
| 150 | 15 | K, M | 1KHz, 0.25V | 0.19 | 0.140 | 0.104 | 1.70 | 1.30 | 1.24 |
| 180 | 18 | K, M | 1KHz, 0.25V | 0.21 | 0.150 | 0.111 | 1.60 | 1.23 | 1.12 |
| 220 | 22 | K, M | 1KHz, 0.25V | 0.28 | 0.180 | 0.129 | 1.50 | 1.11 | 1.07 |
| 270 | 27 | K, M | 1KHz, 0.25V | 0.32 | 0.200 | 0.153 | 1.40 | 0.97 | 0.94 |
| 330 | 33 | K, M | 1KHz, 0.25V | 0.38 | 0.230 | 0.170 | 1.10 | 0.88 | 0.85 |
| 390 | 39 | K, M | 1KHz, 0.25V | 0.42 | 0.320 | 0.217 | 1.00 | 0.80 | 0.74 |
| 470 | 47 | K, M | 1KHz, 0.25V | 0.43 | 0.370 | 0.252 | 0.90 | 0.72 | 0.68 |
| 560 | 56 | K, M | 1KHz, 0.25V | 0.50 | 0.420 | 0.282 | 0.85 | 0.68 | 0.64 |
| 680 | 68 | K, M | 1KHz, 0.25V | 0.68 | 0.460 | 0.332 | 0.80 | 0.61 | 0.59 |
| 820 | 82 | K, M | 1KHz, 0.25V | 0.82 | 0.600 | 0.406 | 0.65 | 0.58 | 0.54 |
| 101 | 100 | K, M | 1KHz, 0.25V | 1.10 | 0.700 | 0.481 | 0.60 | 0.52 | 0.51 |
| 121 | 120 | K, M | 1KHz, 0.25V | 1.20 | 0.930 | 0.536 | 0.58 | 0.48 | 0.49 |
| 151 | 150 | K, M | 1KHz, 0.25V | 1.50 | 1.100 | 0.755 | 0.43 | 0.40 | 0.40 |
| 181 | 180 | K, M | 1KHz, 0.25V | 1.80 | 1.380 | 1.022 | 0.41 | 0.38 | 0.36 |
| 221 | 220 | K, M | 1KHz, 0.25V | 2.00 | 1.570 | 1.200 | 0.38 | 0.35 | 0.31 |
| 271 | 270 | K, M | 1KHz, 0.25V | 2.90 | 1.600 | 1.306 | 0.35 | 0.34 | 0.29 |
| 331 | 330 | K, M | 1KHz, 0.25V | 3.30 | 1.820 | 1.495 | 0.28 | 0.32 | 0.28 |
| 391 | 390 | K, M | 1KHz, 0.25V | 3.70 | - | 1.700 | 0.26 | - | 0.27 |
| 471 | 470 | K, M | 1KHz, 0.25V | 4.90 | 2.760 | 2.100 | 0.20 | 0.30 | 0.26 |
| 561 | 560 | K, M | 1KHz, 0.25V | 5.00 | 3.100 | 2.660 | 0.19 | 0.29 | 0.25 |
| 681 | 680 | K, M | 1KHz, 0.25V | 6.00 | 4.050 | 3.000 | 0.18 | 0.28 | 0.23 |
| 821 | 820 | K, M | 1KHz, 0.25V | 6.60 | 5.560 | 3.630 | 0.15 | 0.27 | 0.21 |
| 102 | 1000 | K, M | 1KHz, 0.25V | 8.00 | 5.740 | 4.760 | 0.13 | 0.26 | 0.20 |

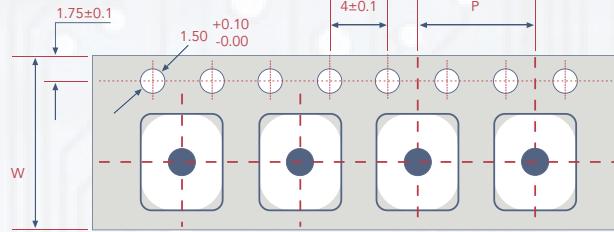
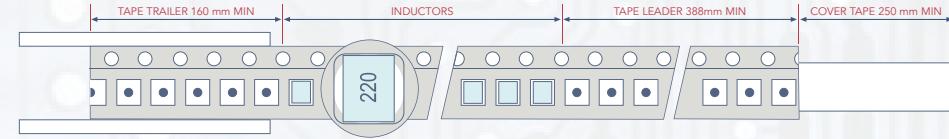
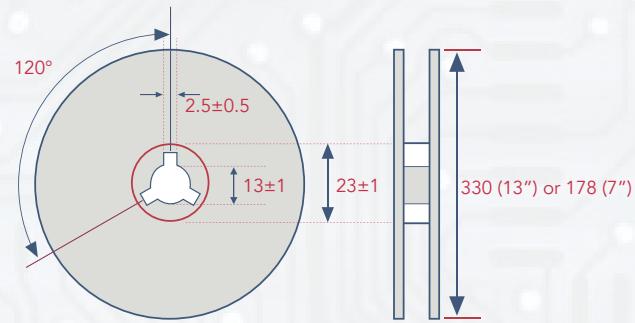
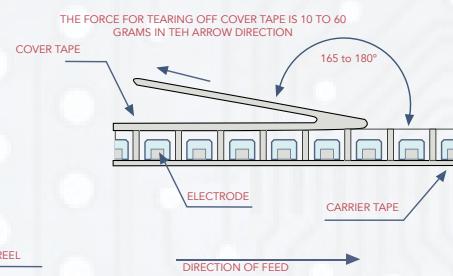
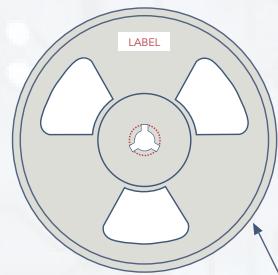
Cal-Chip
Electronics Inc.



ELECTRICAL CHARACTERISTICS

CCD0705 / 1004 / 1005 / 1006 TYPE

| CODES | L (μ H) | TOLERANCE | TEST CONDITION | DCR (Ω) MAX | | | | IDC (A) MAX | | | |
|-------|-----------------|-----------|----------------|----------------------|-------|-------|-------|-------------|------|------|------|
| | | | | 0705 | 1004 | 1005 | 1006 | 0705 | 1004 | 1005 | 1006 |
| 1R0 | 1.0 | M | 100KHz, 0.25V | 0.013 | 0.012 | - | 0.008 | 3.40 | 8.70 | - | 9.50 |
| 1R2 | 1.2 | M | 100KHz, 0.25V | - | 0.014 | 0.009 | - | - | 8.00 | 8.63 | - |
| 1R5 | 1.5 | M | 100KHz, 0.25V | 0.016 | 0.016 | 0.010 | - | 3.30 | 7.48 | 8.00 | - |
| 1R8 | 1.8 | M | 100KHz, 0.25V | 0.02 | 0.018 | - | 0.011 | 3.20 | 6.80 | - | 8.60 |
| 2R2 | 2.2 | M | 100KHz, 0.25V | 0.023 | 0.020 | 0.014 | 0.012 | 3.00 | 5.40 | 6.80 | 7.20 |
| 2R5 | 2.5 | M | 100KHz, 0.25V | 0.026 | - | - | - | 2.90 | - | - | - |
| 2R7 | 2.7 | M | 100KHz, 0.25V | 0.027 | 0.024 | - | - | 2.85 | 3.20 | - | - |
| 3R3 | 3.3 | M | 100KHz, 0.25V | 0.028 | 0.028 | 0.018 | 0.016 | 2.80 | 2.85 | 3.05 | 6.80 |
| 3R9 | 3.9 | M | 100KHz, 0.25V | - | 0.030 | - | 0.017 | - | 2.80 | - | 6.35 |
| 4R7 | 4.7 | M | 100KHz, 0.25V | 0.045 | 0.038 | 0.020 | 0.019 | 2.70 | 2.75 | 2.90 | 5.45 |
| 5R6 | 5.6 | M | 100KHz, 0.25V | 0.048 | 0.040 | - | 0.024 | 2.65 | 2.70 | - | 4.30 |
| 6R8 | 6.8 | M | 100KHz, 0.25V | 0.058 | 0.042 | 0.040 | 0.35 | 2.50 | 2.65 | 2.75 | 3.52 |
| 8R2 | 8.2 | M | 100KHz, 0.25V | 0.070 | 0.048 | 0.050 | 0.045 | 2.40 | 2.60 | 2.70 | 3.51 |
| 100 | 10 | K, M | 1KHz, 0.25V | 0.070 | 0.053 | 0.060 | 0.060 | 2.30 | 2.38 | 2.60 | 3.50 |
| 120 | 12 | K, M | 1KHz, 0.25V | 0.080 | 0.061 | 0.070 | 0.070 | 2.00 | 2.13 | 2.45 | 3.40 |
| 150 | 15 | K, M | 1KHz, 0.25V | 0.090 | 0.070 | 0.080 | 0.080 | 1.80 | 1.87 | 2.27 | 3.10 |
| 180 | 18 | K, M | 1KHz, 0.25V | 0.100 | 0.081 | 0.090 | 0.090 | 1.60 | 1.73 | 2.15 | 3.00 |
| 220 | 22 | K, M | 1KHz, 0.25V | 0.110 | 0.090 | 0.100 | 0.100 | 1.50 | 1.60 | 1.95 | 2.60 |
| 270 | 27 | K, M | 1KHz, 0.25V | 0.120 | 0.100 | 0.110 | 0.110 | 1.30 | 1.44 | 1.76 | 2.40 |
| 330 | 33 | K, M | 1KHz, 0.25V | 0.130 | 0.120 | 0.120 | 0.120 | 1.20 | 1.26 | 1.50 | 2.30 |
| 390 | 39 | K, M | 1KHz, 0.25V | 0.160 | 0.151 | 0.140 | 0.140 | 1.10 | 1.20 | 1.37 | 2.10 |
| 470 | 47 | K, M | 1KHz, 0.25V | 0.180 | 0.170 | 0.170 | 0.170 | 1.40 | 1.10 | 1.28 | 1.95 |
| 560 | 56 | K, M | 1KHz, 0.25V | 0.240 | 0.199 | 0.190 | 0.190 | 0.94 | 1.01 | 1.17 | 1.85 |
| 680 | 68 | K, M | 1KHz, 0.25V | 0.280 | 0.223 | 0.220 | 0.220 | 0.85 | 0.91 | 1.11 | 1.65 |
| 820 | 100 | K, M | 1KHz, 0.25V | 0.370 | 0.252 | 0.250 | 0.250 | 0.78 | 0.85 | 1.00 | 1.50 |
| 101 | 100 | K, M | 1KHz, 0.25V | 0.430 | 0.344 | 0.350 | 0.350 | 0.72 | 0.74 | 0.97 | 1.40 |
| 121 | 120 | K, M | 1KHz, 0.25V | 0.470 | 0.396 | 0.400 | 0.400 | 0.66 | 0.69 | 0.89 | 1.30 |
| 151 | 150 | K, M | 1KHz, 0.25V | 0.640 | 0.544 | 0.470 | 0.470 | 0.58 | 0.61 | 0.78 | 1.20 |
| 181 | 180 | K, M | 1KHz, 0.25V | 0.710 | 0.621 | 0.630 | 0.630 | 0.51 | 0.56 | 0.72 | 1.00 |
| 221 | 220 | K, M | 1KHz, 0.25V | 0.960 | 0.721 | 0.730 | 0.730 | 0.49 | 0.53 | 0.66 | 0.95 |
| 271 | 270 | K, M | 1KHz, 0.25V | 1.110 | 0.949 | 0.970 | 0.970 | 0.42 | 0.45 | 0.57 | 0.90 |
| 331 | 330 | K, M | 1KHz, 0.25V | 1.260 | 1.100 | 1.150 | 1.150 | 0.40 | 0.42 | 0.52 | 0.80 |
| 391 | 390 | K, M | 1KHz, 0.25V | 1.770 | 1.245 | 1.300 | 1.300 | 0.36 | 0.38 | 0.48 | 0.75 |
| 471 | 470 | K, M | 1KHz, 0.25V | 1.960 | 1.526 | 1.480 | 1.480 | 0.34 | 0.35 | 0.42 | 0.65 |
| 561 | 560 | K, M | 1KHz, 0.25V | 2.280 | 1.904 | 1.900 | 1.900 | 0.32 | 0.32 | 0.33 | 0.60 |
| 681 | 680 | K, M | 1KHz, 0.25V | 2.480 | - | 2.250 | 2.250 | 0.30 | - | 0.28 | 0.50 |
| 821 | 820 | K, M | 1KHz, 0.25V | 3.400 | - | 2.550 | 2.550 | 0.30 | - | 0.24 | 0.48 |
| 102 | 1000 | K, M | 1KHz, 0.25V | 4.200 | - | 3.490 | 3.000 | 0.30 | - | 0.20 | 0.46 |


TAPE AND REEL SPECIFICATIONS


| TYPE | TAPE SIZE | | PARTS PER REEL | UNIT: mm |
|---------|-----------|---|----------------|----------|
| | W | P | | |
| CCD0301 | 12 | 8 | 3000 | |
| CCD0302 | 12 | 8 | 2000 | |
| CCD0403 | 12 | 8 | 1500 | |
| CCD0502 | 12 | 8 | 2000 | |
| CCD0503 | 12 | 8 | 1500 | |
| CCD0504 | 12 | 8 | 1500 | |

| TYPE | TAPE SIZE | | PARTS PER REEL | UNIT: mm |
|---------|-----------|----|----------------|----------|
| | W | P | | |
| CCD0703 | 16 | 12 | 1500 | |
| CCD0705 | 16 | 12 | 1000 | |
| CCD1004 | 24 | 16 | 1000 | |
| CCD1005 | 24 | 16 | 500 | |
| CCD1006 | 24 | 16 | 500 | |



Cal-Chip
Electronics Inc.