

Molded Chip Wirewound Inductors

OUTLINE

• These revolutionary, high reliability winding type leadless (wound chip) inductors for automatic mounting have been developed in response to the trend toward higher density of parts in electronic circuits.

• Since metal terminals are used as the electrodes and the body is molded of heat resin, these inductors offer many superior features.


RECOMMENDED APPLICATIONS

• Microtelevisions, liquid crystal televisions, video cameras, portable VCRs, car radios, car stereos, thin type radios, television tuners, mobile telephones, radio equipment and modules such as hybrid ICs.

FEATURES

- Leaching resistant terminations due to metal tab electrodes.
- Coils encapsulated in heat-proof resin make high accurate dimensions and resistant to mechanical shock or pressure.
- High resistance to heat and humidity.
- Matched parts on taping-reel.

SHAPE & DIMENSIONS

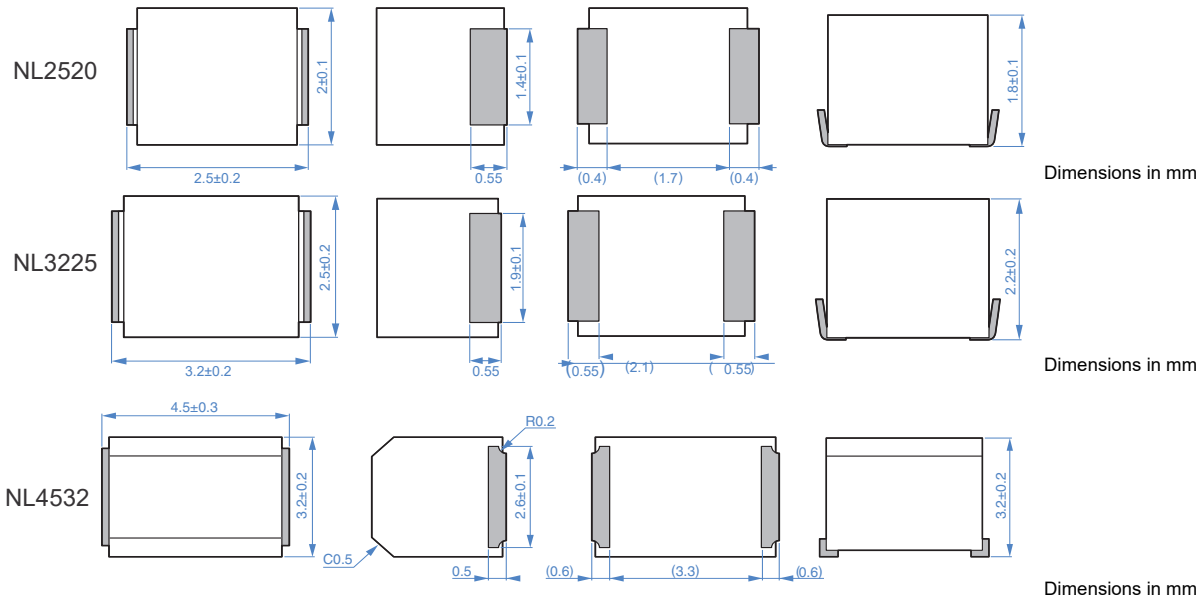

STANDARD SPECIFICATIONS

Temperature Rise	20°C max.
Ambient Temperature	80°C
Storage Temperature	-40 to +100°C
Operating Temperature	-20 to +100°C
Terminal Tensile Strength	1 kg min. (0.5 kg for NL3225)
Current Rating	Value obtained when current flows and the temperature has risen to 20°C or when LC current flows and the initial value of inductance has fallen by 10% whichever is smaller
Resistance to Soldering Heat	260°C, 10 seconds
Resistance to Solvent	Conforms to ML-STD-202E



INDUCTANCE RANGE

Part No.	Inductance (μH)	Size
NL2520	.01 to 100	1008
NL3225	.01 to 220	1210
NL4532	.22 to 1000	1812

PACKAGING QUANTITY

TYPE	PCS./BULK	PCS./REEL
NL2520	2000	2000
NL3225	2000	2000
NL4532	500	500

ORDERING CODE

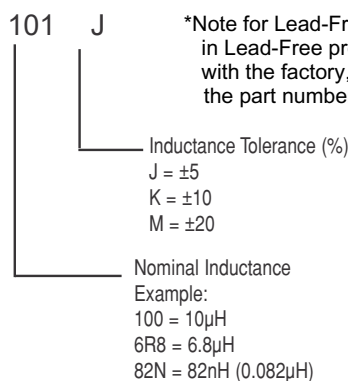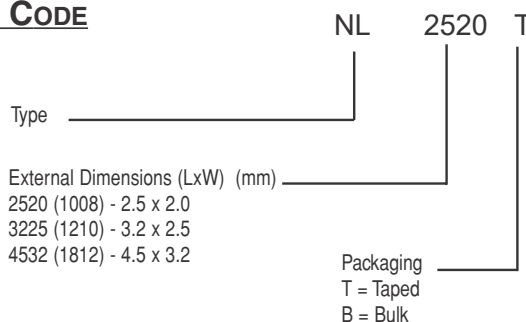

*Note for Lead-Free: Cal-Chip is beginning to phase in Lead-Free products. Upon checking availability with the factory, please specify "LF" at the end of the part number.

Molded Chip Wirewound Inductors - NL2520

• NL2520 TYPE (nH type)

Ordering Code	Inductance (nH)	Inductance Tolerance	Q min.	Self-Resonant Frequency (MHz) (min)	(DC) Resistance (Ω) (max.)	Rated Current (mA) (max.)	Measuring Frequency (MHz)	
NL2520T10NK	10	±10%	10	2150	0.26	530	100	
NL2520T12NK	12			15	2050	0.27		500
NL2520T15NK	15				1850	0.31		480
NL2520T18NK	18		15	15	1650	0.34		450
NL2520T22NK	22				1550	0.38		420
NL2520T27NK	27		15	15	1400	0.42		410
NL2520T33NK	33				1250	0.46		400
NL2520T39NK	39		15	15	1100	0.50		380
NL2520T47NK	47				1050	0.56		360
NL2520T56NK	56		15	15	950	0.65		340
NL2520T68NK	68				900	0.70		320
NL2520T82NK	82		15	15	850	0.75		300
NL2520T10K	100				700	0.80		280


• NL2520 TYPE (ordinary type)

Ordering Code	Inductance (μ H)	Inductance Tolerance	Q min.	Self-Resonant Frequency (MHz) (min)	(DC) Resistance (Ω) (max.)	Rated Current (mA) (max.)	Measuring Frequency (MHz)
NL2520TR12□	0.12	±5%	30	600	0.37	520	25.2
NL2520TR15□	0.15			550	0.42	480	
NL2520TR18□	0.18			500	0.46	460	
NL2520TR22□	0.22			450	0.52	430	
NL2520TR27□	0.27			425	0.56	420	
NL2520TR33□	0.33			400	0.60	400	
NL2520TR39□	0.39			375	0.65	375	
NL2520TR47□	0.47			350	0.68	350	
NL2520TR56□	0.56			300	0.75	325	
NL2520TR68□	0.68			270	0.85	300	
NL2520TR82□	0.82			250	1.00	260	
NL2520T1R0□	1.0			220	1.10	245	
NL2520T1R2□	1.2			180	1.20	230	
NL2520T1R5□	1.5			135	1.30	220	
NL2520T1R8□	1.8			100	1.45	210	
NL2520T2R2□	2.2			75	1.55	200	
NL2520T2R7□	2.7	55	1.70	195			
NL2520T3R3□	3.3	±10%	25	48	1.90	185	7.96
NL2520T3R9□	3.9			43	2.10	180	
NL2520T4R7□	4.7			40	2.30	175	
NL2520T5R6□	5.6			36	2.50	170	
NL2520T6R8□	6.8			33	2.70	165	
NL2520T8R2□	8.2			30	3.05	160	
NL2520T10□	10			27	3.50	155	
NL2520T12□	12			23	3.80	150	
NL2520T15□	15			20	4.40	140	
NL2520T18□	18			18	4.80	130	
NL2520T22□	22			17	5.50	125	
NL2520T27□	27			16	6.30	115	
NL2520T33□	33			15	7.10	110	
NL2520T39□	39			14	9.50	90	
NL2520T47□	47			13	11.10	80	
NL2520T56□	56			12	12.10	75	
NL2520T68□	68	11	16.60	70			
NL2520T82□	82	10	19.00	65			
NL2520T101□	100	9	21.00	60	0.796		


□ Please specify Tolerance Code.

NL2520TYPE


Operating Temperature Range: -25~+85°C

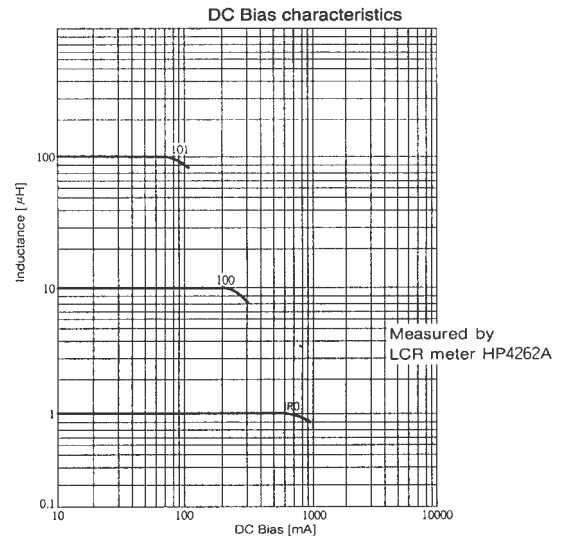

Q Characteristics

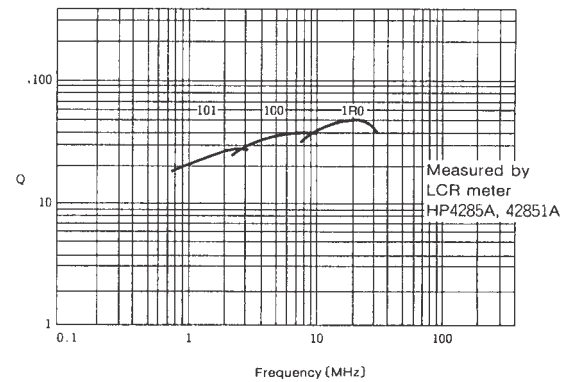

Temperature Characteristics

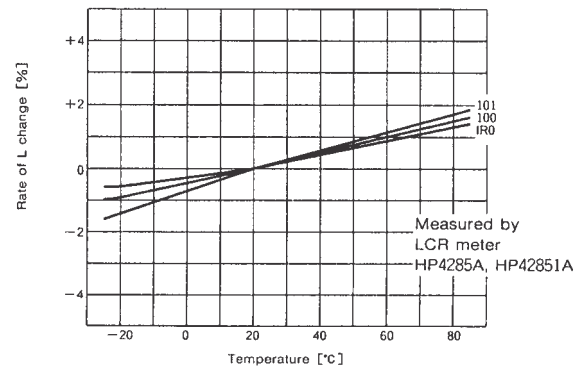

Molded Chip Wirewound Inductors - NL3225

• NL3225 TYPE (nH type)


Ordering Code	Inductance (nH)	Inductance Tolerance	Q min.	Self-Resonant Frequency (MHz) (min)	(DC) Resistance (Ω) (±40%)	Rated Current (mA) (max.)	Measuring Frequency (MHz)
NL3225T10N□	10	±10% ±20%	10	2500	0.09	720	100
NL3225T12N□	12			2300	0.10	710	
NL3225T15N□	15			2100	0.13	620	
NL3225T18N□	18			1900	0.14	600	
NL3225T22N□	22		15	1700	0.16	560	
NL3225T27N□	27			1500	0.18	530	
NL3225T33N□	33			1400	0.20	500	
NL3225T39N□	39			1300	0.22	480	
NL3225T47N□	47			1200	0.24	450	
NL3225T56N□	56			1100	0.27	430	
NL3225T68N□	68			1000	0.29	410	
NL3225T82N□	82			900	0.32	390	
NL3225TR10□	100			700	0.35	380	

• NL3225 TYPE (ordinary type)

Ordering Code	Inductance (μH)	Inductance Tolerance	Q min.	Self-Resonant Frequency (MHz) (min)	(DC) Resistance (Ω) (±40%)	Rated Current (mA) (max.)	Measuring Frequency (MHz)
NL3225TR12□	0.12	±20% ±10% ±5%	25	330	0.14	640	25.2
NL3225TR15□	0.15			290	0.16	610	
NL3225TR18□	0.18			260	0.18	580	
NL3225TR22□	0.22			230	0.20	550	
NL3225TR27□	0.27			210	0.22	520	
NL3225TR33□	0.33			190	0.24	500	
NL3225TR39□	0.39			170	0.26	480	
NL3225TR47□	0.47			150	0.29	460	
NL3225TR56□	0.56			130	0.33	430	
NL3225TR68□	0.68			120	0.35	410	
NL3225TR82□	0.82			100	0.39	390	
NL3225TR1R0□	1.0			90	0.44	370	
NL3225TR1R2□	1.2			85	0.48	350	
NL3225TR1R5□	1.5			70	0.54	330	
NL3225TR1R8□	1.8	60	0.58	320			
NL3225TR2R2□	2.2	50	0.67	300			
NL3225TR2R7□	2.7	45	0.72	290			
NL3225TR3R3□	3.3	40	0.80	270			
NL3225TR3R9□	3.9	37	0.88	260			
NL3225TR4R7□	4.7	32	0.95	250			
NL3225TR5R6□	5.6	30	1.1	230			
NL3225TR6R8□	6.8	28	1.2	220			
NL3225TR8R2□	8.2	25	1.3	215			
NL3225T100□	10	23	1.4	200			
NL3225T120□	12	20	1.6	190			
NL3225T150□	15	19	1.8	180			
NL3225T180□	18	17	1.9	175			
NL3225T220□	22	16	3.1	140			
NL3225T270□	27	14	3.5	130			
NL3225T330□	33	13	3.9	125			
NL3225T390□	39	12	4.3	120			
NL3225T470□	47	10	6.0	100			
NL3225T560□	56	9	6.5	95			
NL3225T680□	68	9	7.3	90			
NL3225T820□	82	8	10.2	75			
NL3225T101□	100	7	11.3	70			
NL3225T121□	120	7	11.3	65			
NL3225T151□	150	6	13.0	60			
NL3225T181□	180	6	15.0	55			
NL3225T221□	220	5	17.0	50			
			20				0.796


□ Please specify Tolerance Code.

NL3225TYPE

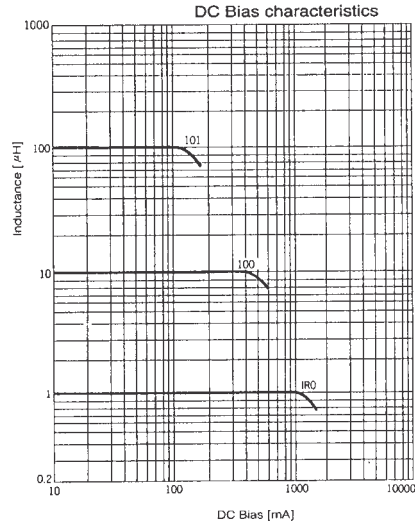


Measured by LCR meter HP4262A

Q Characteristics

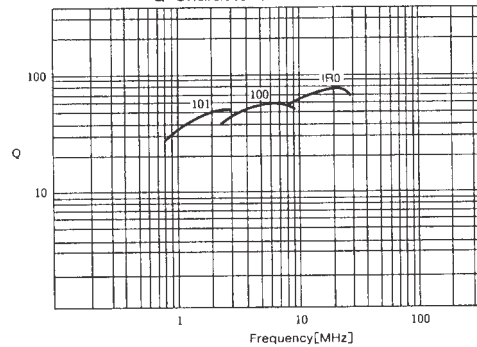

Measured by LCR meter HP4285A, 42851A

Temperature Characteristics

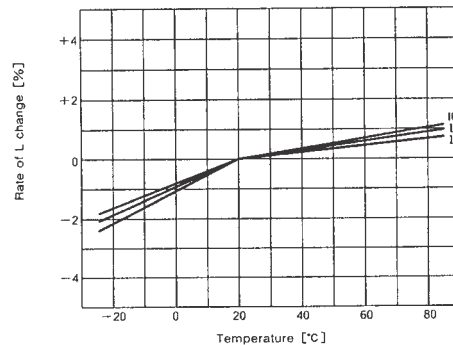

Measured by LCR meter HP4285A, 42851A

Molded Chip Wirewound Inductors - NL4532


• NL4532 TYPE

Ordering Code	Inductance (μH)	Inductance Tolerance	Q min.	Self-Resonant Frequency (MHz) (min)	(DC) Resistance (Ω)	Rated Current (mA) (max.)	Measuring Frequency (MHz)
NL4532TR22□	0.22	±10% ±20%	40	150	0.10±50%	710	25.2
NL4532TR27□	0.27			150	0.10±50%	710	
NL4532TR33□	0.33			150	0.11±50%	670	
NL4532TR39□	0.39			150	0.12±50%	650	
NL4532TR47□	0.47			150	0.13±50%	620	
NL4532TR56□	0.56			150	0.14±50%	600	
NL4532TR68□	0.68			130	0.15±50%	580	
NL4532TR82□	0.82	110	0.16±50%	560			
NL4532T1R0□	1.0	±20% ±10%	50	100	0.18±50%	530	7.96
NL4532T1R2□	1.2			80	0.20±50%	500	
NL4532T1R5□	1.5			70	0.22±50%	480	
NL4532T1R8□	1.8			60	0.24±50%	460	
NL4532T2R2□	2.2			55	0.27±50%	430	
NL4532T2R7□	2.7			50	0.30±50%	410	
NL4532T3R3□	3.3			45	0.32±50%	400	
NL4532T3R9□	3.9			40	0.35±50%	380	
NL4532T4R7□	4.7			35	0.38±50%	360	
NL4532T5R6□	5.6			30	0.42±50%	350	
NL4532T6R8□	6.8			25	0.46±50%	330	
NL4532T8R2□	8.2			23	0.51±50%	310	
NL4532T100□	10			20	0.56±50%	300	
NL4532T120□	12			19	0.9±50%	230	
NL4532T150□	15	18	1.0±50%	220			
NL4532T180□	18	17	1.1±50%	210			
NL4532T220□	22	16	1.2±40%	200			
NL4532T270□	27	15	1.4±40%	190			
NL4532T330□	33	14	1.6±40%	180			
NL4532T390□	39	13	1.7±40%	170			
NL4532T470□	47	12	1.9±40%	160			
NL4532T560□	56	11	2.8±40%	130			
NL4532T680□	68	9.5	3.1±40%	125			
NL4532T820□	82	9.0	3.5±40%	120			
NL4532T101□	100	8.5	4.0±40%	110			
NL4532T121□	120	7.0	6.6±40%	85			
NL4532T151□	150	6.0	7.6±40%	80			
NL4532T181□	180	5.5	8.6±40%	75			
NL4532T221□	220	5.0	9.8±40%	70			
			40				2.52
			50				0.796


330MH to 1000 MH available as special order. ±10%

□ Please specify Tolerance Code.


NL4532TYPE

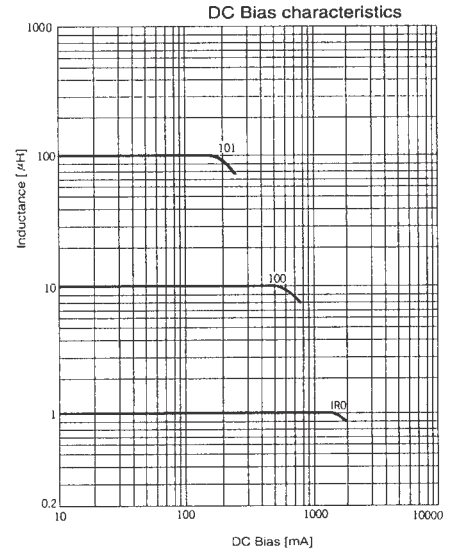

Q Characteristics

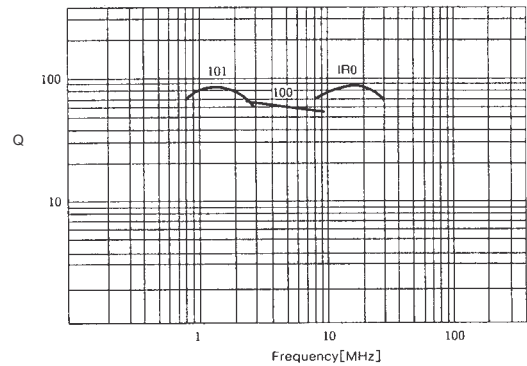


Temperature Characteristics

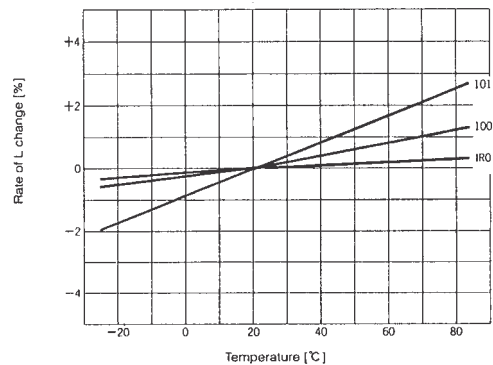

Molded Chip Wirewound Inductors

REEL DIMENSIONS

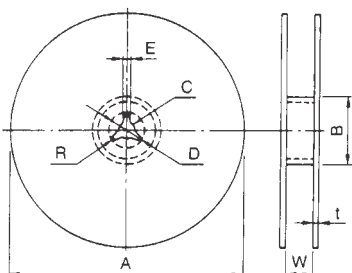

Dimensions in mm (inches)




A	B	C	D	E	W	t	R
$\phi 178 \pm 2$ (7.008 ± 0.079)	$\phi 50$ (1.969) min.	$\phi 13 \pm 0.5$ (.512 ± 0.020)	$\phi 21 \pm 0.8$ (.827 ± 0.04)	2 ± 0.5 (.079 ± 0.020)	14 ± 0.5 (.551 ± 0.020)	2 ± 0.5 (.079 ± 0.020)	1 (.039)

*NL2520 and NL3225 types: 10mm (.394 inches)

*NL4532 type are available for $\phi 330$ mm (12.992 inches) reel packaging

TAPING MATERIAL

Embossed Carrier Tape

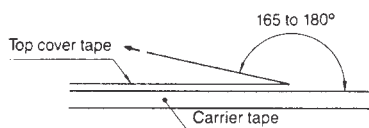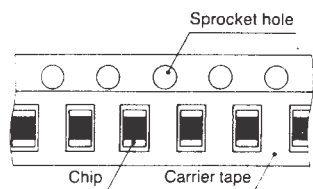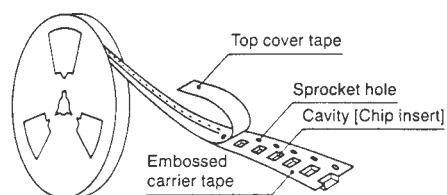


*The force for tearing off cover tape is 10 to 60 grams in the arrow direction.


Molded Chip Wirewound Inductors

RECOMMENDED SOLDERING CONDITIONS


Reflow Soldering

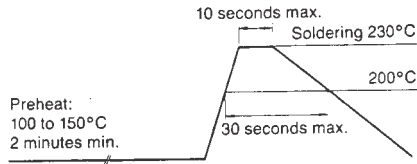

TAPE DIMENSIONS (EIAJ RC-1009)

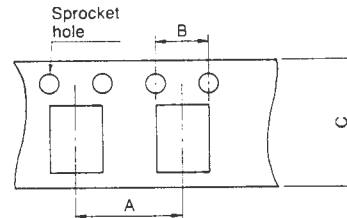

Flow Soldering

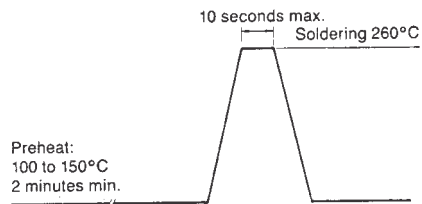

Dimensions in mm (inches)


TYPE	A	B	C
NL2520	4(.157)	4(.157)	8(.315)
NL3225	4(.157)	4(.157)	8(.315)
NL4532	8(.315)	4(.157)	12(.472)

The storage temperature range for packaging is 0 to 60C.


Iron Soldering

Perform soldering at 250°C on 30W max. within 5 second.

Take care not to apply the tip of soldering iron to the terminal electrode.

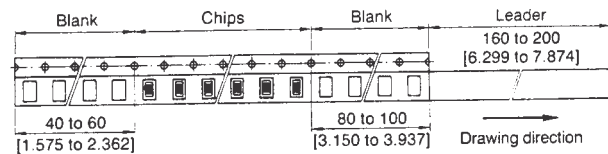

Vapor-Phasing

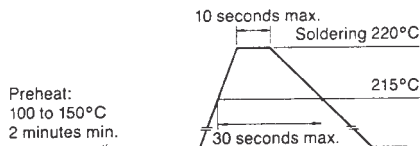

PACKAGING

TYPE	QUANTITY (pcs./reel)
NL2520	2000
NL3225	2000
NL4532	500

FLUX AND CLEANING

Rosin-based flux is recommended.

Cleaning Conditions

Solvent: Chlorine-based solvent
(Do not use acid or alkali solvents)

Time: 2 minutes min. for ultrasonic cleaning