


T0-220 Power Resistor - RTR50-H



Construction and Dimensions

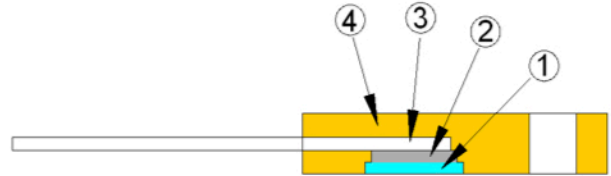

① Alumina Substrate	③ Lead
② Resistor Layer	④ Molding



Features

- 50 watts at $\leq 25^{\circ}\text{C}$ case temperature heat sink mounted
- TO-220 style power package
- Fixed with a M3 screw on system heat sink.
- Improve the heat dissipation by ceramic exposure design with external fix jig to mount the chip on heat sink

Applications

- Power Supplies
- Non-inductive Design for High Frequency
- Pulsing Applications

Derating Curve

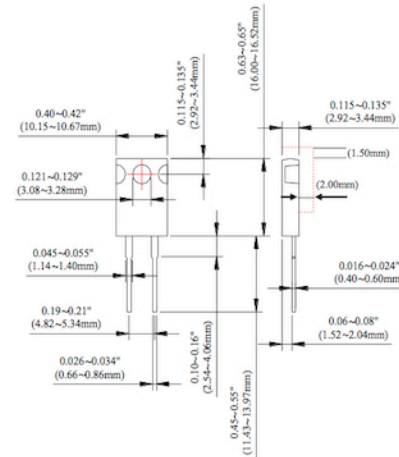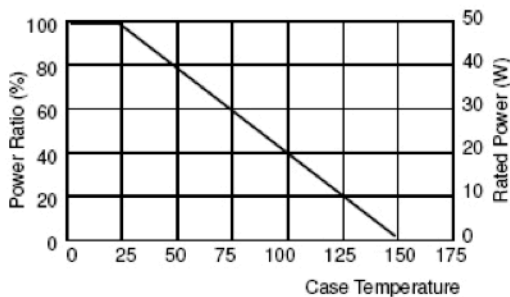

Dimensions

Unit : mm

Type	Weight (g) (1000pcs)
RTR50-H	2770

Part Numbering

RTR	50	J	1001	B	50	-H
Product Type	Power	Resistance Tolerance	Resistance	Packaging Code	TCR (PPM/°C)	Code
	50: 50 Watts	D: $\pm 0.5\%$ F: $\pm 1\%$ J: $\pm 5\%$ K: $\pm 10\%$	R100: 0.1 Ω 0100: 10 Ω 4700: 470 Ω 1001: 1000 Ω 1002: 10000 Ω	B: Bulk	50: ± 50 100: ± 100 200: ± 200 300: ± 300	H: Hole

■ Electrical Characteristics Specifications

Type	Item	Resistance Range				TCR (PPM/°C)
		±0.5%	±1%	±5%	±10%	
RTR50-H	-	-	0.1Ω -1Ω		No Specified	
	-	>1Ω -3Ω			±300	
	-	>3Ω -10Ω			±100 ±200	
	>10Ω -10KΩ				±50 ±100 ±200	

- Operating Voltage: 420V DC Max.
- Dielectric Strength: 1800VAC
- Insulation Resistance: 10GΩ min.

■ Environmental Characteristics

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	Referenced to 25°C, ΔR taken at +105°C
Short Time Overload	ΔR±0.3%	2 times rated power with applied voltage not to exceed 1.5 times maximum continuous operating voltage for 5 seconds
Load Life	ΔR±1.0%	2,000 hours at rated power
Damp Heat with Load	ΔR±0.5%	40±2°C, 90~95% R.H., RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Solderability	90% min. coverage	245±5°C for 3 seconds
Thermal Shock	ΔR±0.3%	-65°C ~150°C, 100 cycles
Terminal Strength	ΔR±0.2%	(Pull Test) 2.4N
Vibration, High Frequency	ΔR±0.2%	20g peak

- Lead Material: Tinned Copper
- Maximum Torque: 0.9 N-m
- Without a Heat Sink, When in Free Air at 25°C, the RTR50-H is rated for 2.25W
- The Case Temperature is to be used for the Definition of the Applied Power Limit.
- The Case Temperature Measurement Must be Made with a Thermocouple Contacting the Center of the Component Mounted on the Designed Heat Sink.
- Thermal Grease Should be Applied Properly.

RCWV(Rated continuous working voltage)= $\sqrt{P \cdot R}$ or Max. Operating voltage whichever is lower