

# SMD ALUMINUM ELECTROLYTIC CAPACITORS


## - CVS SERIES -

### FEATURES

- 4 $\phi$ ~6.3 $\phi$ , 105°C, 1,000 hours assured
- Vertical chip type miniaturized for 5.5mm high capacitor
- Designed for surface mounting on high density PC board
- RoHS Compliance



### CONSTRUCTION AND DIMENSIONS

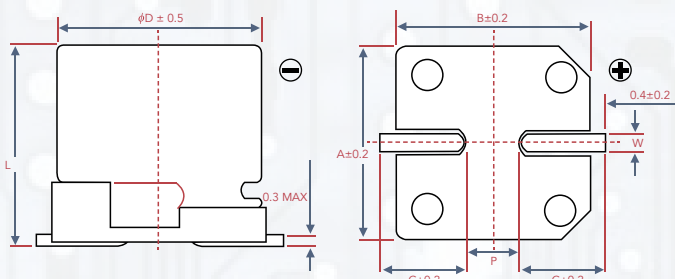

### LEAD SPACING AND DIAMETER

UNIT : MM

$\phi D$	L	A	B	C	W	P $\pm 0.2$
4	5.3 $\pm 0.2$	4.3	4.3	2.0	0.5 to 0.8	1.0
5	5.3 $\pm 0.2$	5.3	5.3	2.3	0.5 to 0.8	1.5
6.3	5.3 $\pm 0.2$	6.6	6.6	2.7	0.5 to 0.8	2.0


### SPECIFICATIONS

ITEMS	PERFORMANCE																									
Operating Temperature Range	-55°C ~ +105°C																									
Capacitance Tolerance	$\pm 20\%$ (at 120Hz, 20°C)																									
Leakage Current (at 20°C)	$I = 0.01CV$ or 3 ( $\mu A$ ) whichever is greater (after 2 minutes) Where, C = rated capacitance in $\mu F$ , V = rated DC working voltage in V																									
Dissipation Factor (Tan $\delta$ at 120Hz, 20°C)	<table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>TAN <math>\delta</math> (MAX)</td> <td>0.30</td> <td>0.26</td> <td>0.22</td> <td>0.16</td> <td>0.13</td> <td>0.12</td> </tr> </tbody> </table>	RATED VOLTAGE	6.3	10	16	25	35	50	TAN $\delta$ (MAX)	0.30	0.26	0.22	0.16	0.13	0.12											
RATED VOLTAGE	6.3	10	16	25	35	50																				
TAN $\delta$ (MAX)	0.30	0.26	0.22	0.16	0.13	0.12																				
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below. <table border="1"> <thead> <tr> <th>RATED VOLTAGE</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>IMPEDANCE RATIO</td> <td>Z(-25°C) / Z(+20°C)</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td></td> <td>Z(-40°C) / Z(+20°C)</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	RATED VOLTAGE	6.3	10	16	25	35	50	IMPEDANCE RATIO	Z(-25°C) / Z(+20°C)	4	3	2	2	2		Z(-40°C) / Z(+20°C)	8	5	4	3	3				
RATED VOLTAGE	6.3	10	16	25	35	50																				
IMPEDANCE RATIO	Z(-25°C) / Z(+20°C)	4	3	2	2	2																				
	Z(-40°C) / Z(+20°C)	8	5	4	3	3																				
Load Life Test	<table border="1"> <tbody> <tr> <td>TEST TIME</td> <td>1,000 Hrs</td> </tr> <tr> <td>CAPACITANCE CHANGE</td> <td>Within <math>\pm 20\%</math> of initial value</td> </tr> <tr> <td>DISSIPATION FACTOR</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>LEAKAGE CURRENT</td> <td>Within specified value</td> </tr> </tbody> </table> <p>*The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 1,000 hrs at 105°C.</p>	TEST TIME	1,000 Hrs	CAPACITANCE CHANGE	Within $\pm 20\%$ of initial value	DISSIPATION FACTOR	Less than 200% of specified value	LEAKAGE CURRENT	Within specified value																	
TEST TIME	1,000 Hrs																									
CAPACITANCE CHANGE	Within $\pm 20\%$ of initial value																									
DISSIPATION FACTOR	Less than 200% of specified value																									
LEAKAGE CURRENT	Within specified value																									
Shelf Life Test	Test time; 1,000 hrs; other items are the same as those for the load life test																									
Ripple Current & Frequency Multipliers	<table border="1"> <thead> <tr> <th>FREQUENCY (Hz)</th> <th colspan="4">V.DC(V)</th> </tr> <tr> <th></th> <th>50</th> <th>120</th> <th>1K</th> <th>10K up</th> </tr> </thead> <tbody> <tr> <td>Under 16</td> <td>0.8</td> <td>1.0</td> <td>1.15</td> <td>1.25</td> </tr> <tr> <td>25-35</td> <td>0.8</td> <td>1.0</td> <td>1.25</td> <td>1.40</td> </tr> <tr> <td>50</td> <td>0.8</td> <td>1.0</td> <td>1.35</td> <td>1.50</td> </tr> </tbody> </table>	FREQUENCY (Hz)	V.DC(V)					50	120	1K	10K up	Under 16	0.8	1.0	1.15	1.25	25-35	0.8	1.0	1.25	1.40	50	0.8	1.0	1.35	1.50
FREQUENCY (Hz)	V.DC(V)																									
	50	120	1K	10K up																						
Under 16	0.8	1.0	1.15	1.25																						
25-35	0.8	1.0	1.25	1.40																						
50	0.8	1.0	1.35	1.50																						
Other Standards	JIS C 5101-1, -18																									

## PART NUMBERS

CVS	1C	100	M	D55	R	
SERIES NAME	RATED VOLTAGE	CAPACITANCE	TOLERANCE	CASE SIZE	PACKAGE TYPE	
Series is represented by a three/four digit code	OG - 4V OJ - 6.3V 1A - 10V 1C - 16V 1E - 25V 1V - 35V 1H - 50V 1J - 63V	1K - 80V 2A - 100V 2C - 160V 2D - 200V 2E - 250V 2G - 400V 2W - 450V	4R7 - 4.7 $\mu$ F 100 - 10 $\mu$ F 471 - 470 $\mu$ F 102 - 1000 $\mu$ F	M: -20% ~+20% K: -10% ~+10% J: -5% ~+5%	B55 - 3x5.3 D55 - 4x5.3 D60 - 4x5.7 E55 - 5x5.3 E60 - 5x5.7 F55 - 6.3x5.3 F60 - 6.3x5.7 F62 - 6.3x6.0 F72 - 6.3x7.0 F80 - 6.3x7.7	G68 - 8x6.5 G72 - 8x7.0 G10 - 8x10.0 G12 - 8x12.0 H82 - 10x8.0 H10 - 10x10.0 H13 - 10x13.0 K14 - 12.5x13.5 K16 - 12.5x16.0 L17 - 16x16.5
					R - Taping polarity with reel package in 380mm	

## MARKING

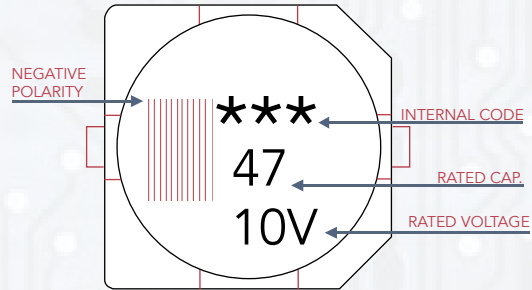

## DIMENSION & PERMISSIBLE RIPPLE CURRENT

VDC	CONTENTS	6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)	
		$\phi$ DxL	mA	$\phi$ DxL	mA	$\phi$ DxL	mA	$\phi$ DxL	mA	$\phi$ DxL	mA	$\phi$ DxL	mA
0.1	0R1											4x5.3	2
0.22	R22											4x5.3	3
0.33	R33											4x5.3	4
.47	R47											4x5.3	5
1	010											4x5.3	7
2.2	2R2											4x5.3	10
3.3	3R3											4x5.3	12
4.7	4R7							4x5.3	12	4x5.3	14	5x5.3	17
10	100			4x5.3	15	4x5.3	16	5x5.3	21	5x5.3	23	6.3x5.3	26
22	220	4x5.3	21	5x5.3	25	5x5.3	28	6.3x5.3	36	6.3x5.3	50	6.3x5.3	51
33	330	5x5.3	30	5x5.3	31	6.3x5.3	40	6.3x5.3	44				
47	470	5x5.3	36	6.3x5.3	43	6.3x5.3	47	6.3x5.3	60				
100	101	6.3x5.3	61	6.3x5.3	65	6.3x5.3	70						

